
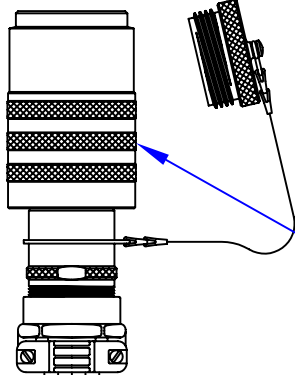


Part Number Code Logic


V-70068 - CA - XXX - XX

A B C D

- A: Ground Power Assembly
- B: CA = Cable Assembly
- C: Length of Cable Assembly (end to end)
EX: 360 = 360 Inches or M20 = 20 Meters
- D: Variables Such as Single Jacketed Cable, Alternate Keying, Color Coding, Multi Hole Grommet.



APU Rubber Plug




Explosionproof Plug: GDT-D1028-35PL-XX.
See Product Data Sheet: PDS-GD-SD-PLUG
for Certifications, Grommet & Bill of Materials.

Plug is Available in Alternate Key Positions
For Example: GDT-D1028-35PL01-XX
Indicates Insert is Keyed in the "01" Position

The "XX" at the End of the Part Number will
be Replaced with a Grommet Code to Fit
Cable Diameter.

Plug is Available with Color Coding to Assure
Proper Mating with Receptacle

Cable Assembly Consists of (4) 1/0 AWG
Conductors and (1) 2 Conductor #12 AWG Cable.
Supports are Located Every 3 Feet.

REV: B	WTN BY: JACK NELLIGAN	DOCUMENT TITLE: CABLE ASSEMBLY GROUND POWER	 Vantage Technology LLC 4675 South Windermere Street Englewood, Colorado USA 80110 Phone: 303-761-2121 ~ Fax: 303-789-4215 Email: service@vantagexp.com ~ Website: www.vantagexp.com	SHEET: 1 OF 1
	CHK BY: JACK NELLIGAN			
	ENG BY: DARRIN J. LOMBARD			
	ATEX: JOHN NORDECK			
	RELEASE DATE: 12-07-05			
APPLICATION DATA SHEET		DOCUMENT NUMBER: ADS-V-70068		