


**ATTACHMENT PLUGS**

**GD-D1016-23PL-XX**

Explosionproof Attachment Plugs with Environmental (D) Threaded Covers and Male (PL) Inserts with (4) Silver Plated 4 Gauge Contacts for Termination to Maximum #8 AWG (10 mm<sup>2</sup>) Wires. The 'XX' will be Replaced with a Cable Diameter Code Number.

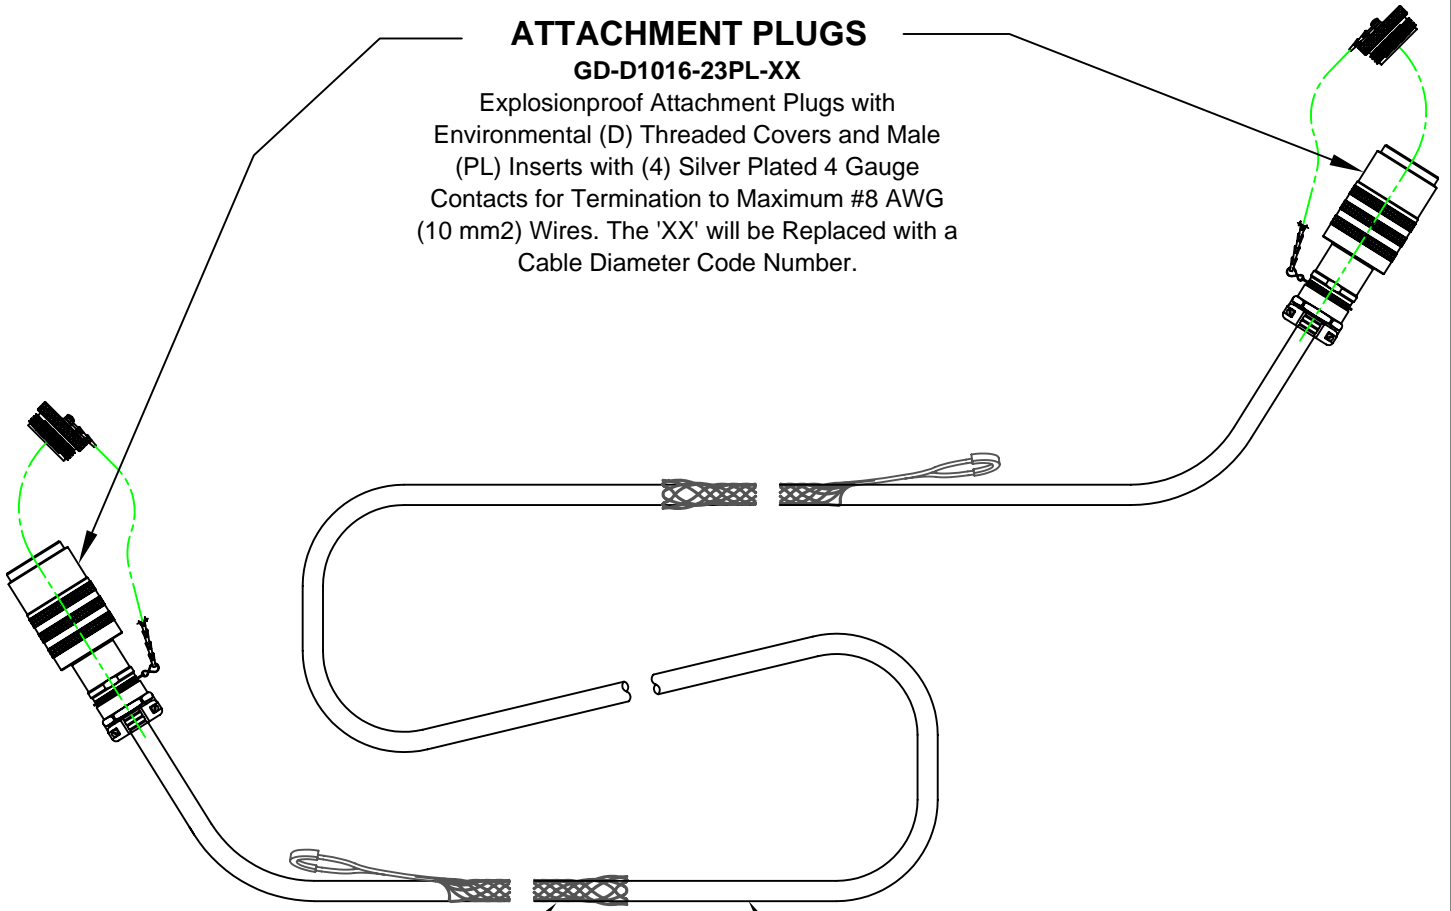


**CABLE**

Heavy Duty, Flexible, Non-Armoured, Shipboard Cable, UL and USCG Approved for Offshore Environments. Available in Customer Required Lengths (typically 35-50 meters).

**UNIVERSAL SUPPORT GRIPS**

Approximately 24" Inboard of the Plugs will be Stainless Steel Universal Support Grips to Relieve Cable Tension. These Grips will be Located on Both Ends of the Cable.

REV: B	WTN BY: JACK NELLIGAN	<p>DOCUMENT TITLE:  <b>EARTH GROUND          SHIP TO SHORE CABLE</b></p>	 <p><b>Vantage Technology</b> LLC          4675 South Windermere Street          Englewood, Colorado USA 80110          Phone: 303-761-2121 ~ Fax: 303-789-4215          Email: service@vantagexp.com ~ Website: www.vantagexp.com</p>	SHEET: 1 OF 1
	CHK BY: DARRIN J. LOMBARD			
	ENG BY: LARRY JONES			
	ATEX: JOHN NORDECK			
	RELEASE DATE: 04-14-05			
<b>APPLICATION DATA SHEET</b>		DOCUMENT NUMBER: <b>ADS-V-70169-CA</b>		